

LiquiMax[®]

MAXIMUM DURABILITY FINISH




Available Packaging

G AP 30G 55G 260MP



The LiquiMax Difference

Buckeye LiquiMax Maximum Durability Finish can extend your strip cycle to 18–36 months. Buckeye LiquiMax utilizes proprietary technology that provides incredible shine, depth of gloss and uniform appearance while resisting scuffing and microabrasions like no other finish. Break the archaic process of stripping floors every 6–12 months. Buckeye LiquiMax stands in the gap left by other finishes that over-promise and under-deliver.

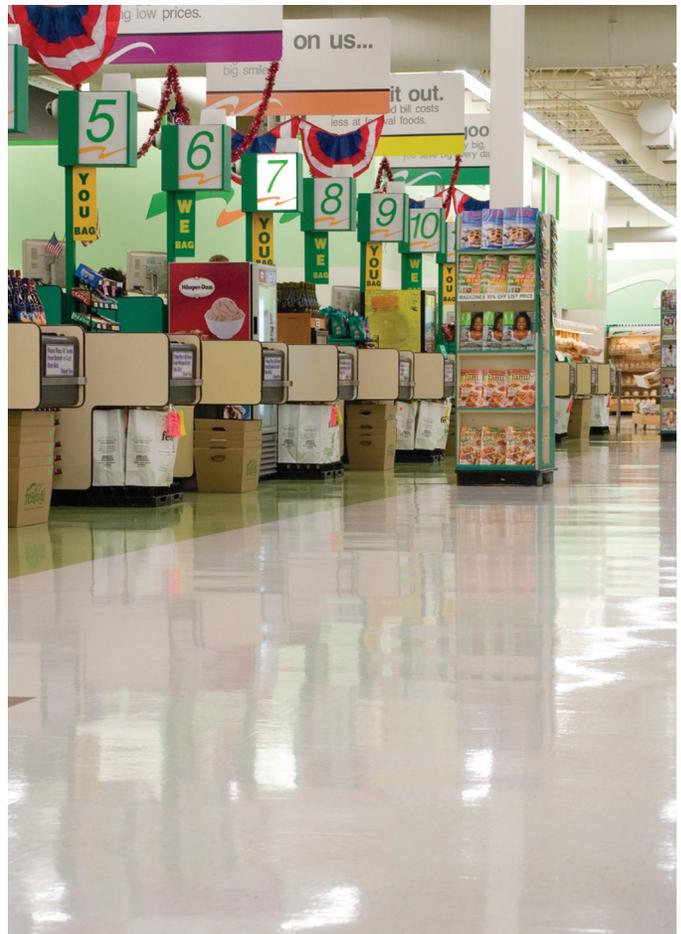

FEATURES

- 18–36 month strip cycle when following recommended procedures
- Microabrasion resistant
- Formulated utilizing proprietary technology
- Works with buff or no buff programs
- Does NOT powder when burnished
- Does NOT yellow over time
- Self-leveling without ridging
- Use on resilient and hard surface floors

LiquiMax[®]

MAXIMUM DURABILITY FINISH

DIRECTIONS FOR USE

FLOOR PREPARATION:

1. Strip floor using **Buckeye RipSaw[®]** or other Buckeye stripper.
2. After picking up solution, rinse floor until no residue remains.
3. Allow floor to dry before applying **Buckeye LiquiMax**.

APPLICATION:

1. Use a clean mop and bucket.
2. Saturate mop, press firmly into wringer to remove excess finish. Do not wring mop.
3. Apply finish in even coats.
4. Allow each coat to dry, usually 20 to 30 minutes.
5. Apply seven coats to achieve maximum gloss. Apply four coats maximum per 24-hour period.

ROUTINE MAINTENANCE:

1. Dust mop floor.
2. Damp mop as required, using **Buckeye Blue** or **Straight-Up[®]**.
3. For optimum performance, burnish floor with machine of your choice and appropriate burnishing pad. If desired, **Buckeye LiquiMax** may be spray buffed or burnished using Buckeye **Equity[™]** or Buckeye **R.P.M.[™]**.

18–36 MONTH MAINTENANCE:

1. Be certain that 7 coats of **Buckeye LiquiMax** are applied. Do not apply more than 4 coats in a 24-hour period.
2. Follow Routine Maintenance Program.
3. Top scrub and recoat every 4-6 months, depending on traffic and weather conditions.

TECHNICAL SPECIFICATIONS

pH	8.2 ± 0.2
Leveling	Excellent
Freeze/Thaw Stability	Pass 3 cycles
Removability	Excellent
Drying Time	20–30 minutes
Black Mark Resistance	Excellent
Film Color	Water Clear
Scrubability	Excellent
Weight/Gallon	8.58 lbs
Slip Resistance	UL Classified



For more information about LiquiMax, scan this code.



BUCKEYE INTERNATIONAL, INC.

2700 WAGNER PLACE • MARYLAND HEIGHTS • MO 63043 • USA • 800.321.2583

www.buckeyeinternational.com